




Die LUNÉA wirft Licht und Schatten, wie Sie es wollen. Der drehbare Schirm ermöglicht die Einstellung einer eigenen Lichtcharakteristik. Die Wirkung der Leuchte im Raum wird durch eine optionale Blattgoldveredelung noch ganz besonders betont.

LUNÉA casts light and shadow as you desire. The rotatable cover permits individual adjustment of the light characteristics. The effect of the luminaire in the interior can be further accentuated with the optional addition of a gold-leaf finish.


*LUNÉA LED

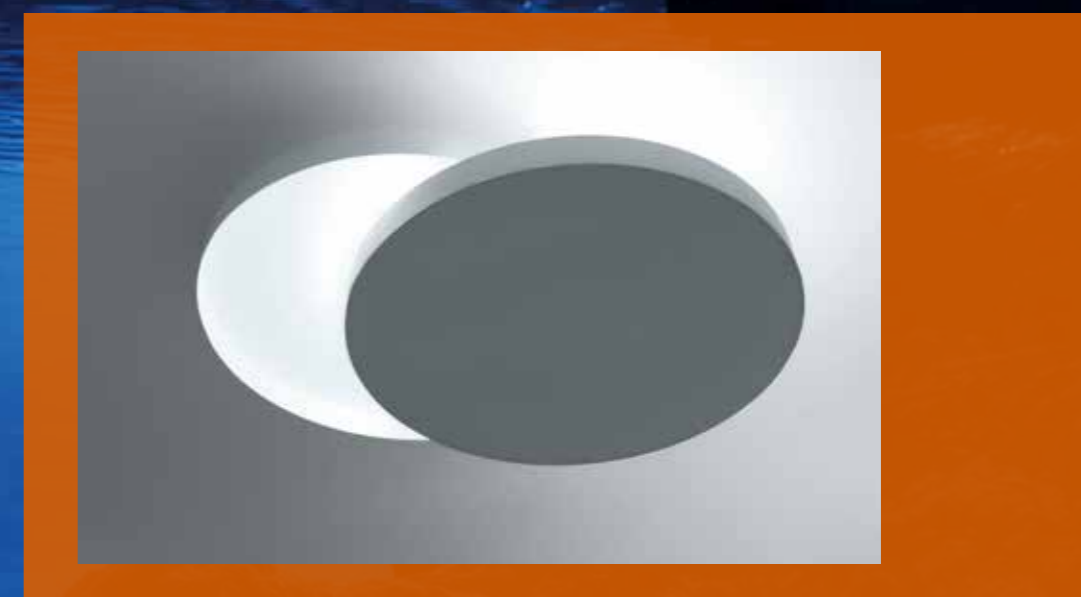

BETALUMEN GmbH

Hebbelstr. 14-18, 01157 Dresden
TEL.: +49 (0) 351 47 96 09 60
FAX: +49 (0) 351 47 96 09 66

WEB: www.betalumen.de
E-MAIL: ideen-werden-leuchten@betalumen.de

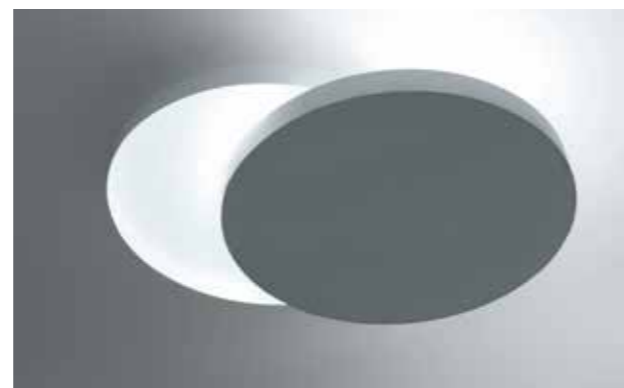

Bauform size	Beschreibung description	Leistung/Kommentar wattage/comment (W)	Gewicht weight (kg)	Bestell-Nr. order number
S (D 205 mm)	E27	2x Halopin 33W Eco/ G9	1,0	2/2672.296.S1
	LED	Module 927, 2x 910 lm / 19,8 W	1,5	2/2672.298.S4350iw90
M (D 395 mm)	E27	2x QT 32 70W/ E27	3,8	2/2479.245.S1
	LED	Module 927, 2x 1554 lm / 26,2 W	4,8	2/2479.298.S4350iw90
	Wandleuchte			4/2479.____W_
L (D 780 mm)	E27	4x QT 32 70W/ E27	15,0	2/2478.445.S1
	LED	Module 927, 4x 1554 lm / 52,4 W	17,0	2/2478.498.S4350iw90
	Wandleuchte			4/2478.____W_

Bestellnummernzusätze:

- Konverter digital dimmbar DALI (LED) /____.S5dd
- Konverter dimmbar Bluetooth®/Casambi™ (LED) /____.S5dW
- Konverter dimmbar 1-10 V (LED)) /____.S5
- Konverter dimmbar Phase-cut (LED) /____.S5Ph
- Wandleuchte 4/____
- Farbe Silber Feinstruktur (RAL 9006) /____.F
- Farbe Schwarz Feinstruktur (RAL 9005) /____.F2
- Blattgold innen /____.S4_g
- Blattsilber (Palladium) innen /____.S4_s
- Blattgold außen /____.S9_g
- Blattsilber (Palladium) außen /____.S9_s

Order number codes:

- DALI digital dimmable converter (LED) /____.S5dd
- Bluetooth®/Casambi™ dimmable converter (LED) /____.S5dW
- 1-10 V dimmable converter (LED) /____.S5
- Phase-cut digital dimmable converter (LED) /____.S5Ph
- Wall luminaire 4/____
- Fine silver structure (RAL 9006) /____.F
- Fine black structure (RAL 9005) /____.F2
- Gold leaf interior /____.S4_g
- Silver leaf (palladium) interior /____.S4_s
- Gold leaf exterior /____.S9_g
- Silver leaf (palladium) exterior /____.S9_s

LEUCHTENBESCHREIBUNG:

- Leuchte in 3 Baugrößen
- Varianten für LED-Retrofit-Leuchtmittel für kostengünstigen Einsatz bei normaler Nutzungsdauer lieferbar
- Schirm 350° drehbar für Einstellung einer personalisierten Lichtcharakteristik

TECHNISCHE DATEN:

- Deckenleuchte
- LED > 80.000 h L80 B10
- Steckkontakt
- Konverter integriert
- Anschluss max. 3* 2,5 mm²
- IP20/I
- Weiß Feinstruktur
- Metall pulverbeschichtet
- Konverter 0/50/60 Hz (AC/DC), 100.000 h

OPTIONEN:

- LED-Parameter (Lichtstrom, Farbwiedergabe, Farbtemperatur) nach Wahl
- Tunable white LED
- Konverter dimmbar (DALI, 1 - 10 V, via Funk/EnOcean, Wireless via App Bluetooth®/Casambi™-, via Taster, via un:c-Bus-IPV6-Netzwerk, via Netzleitung ready2mains™ -...)
- Notlichtfunktionen nach Wahl
- Bauform für Einsatz als Wandleuchte
- RAL-Farbe nach Wahl
- Oberfläche Blattgold oder Blattsilber (Palladium)

HINWEISE

- LUNÉA S ist baugleich als Wand- und Deckenleuchte
- Korpus drehbar 350°

LUMINAIRE DESCRIPTION:

- Luminaire in 3 sizes
- Versions for LED- retrofit lighting available for affordable use with normal service life
- 350° rotatable cover for adjustment of personal light preferences

TECHNICAL DETAILS:

- Ceiling luminaire
- LED > 80,000 h L80 B10
- Plug-in contact
- Integrated converter
- Connection max. 3* 2.5 mm²
- IP20/I
- Fine white structure
- Powder-coated metal
- Converter: 0/50/60 Hz (AC/DC), 100,000 h

OPTIONS:

- LED parameters (luminous flux, colour reproduction, colour temperature) of your choice
- Tunable white LED
- Dimmable converter (DALI, 1-10 V, via wireless/EnOcean, wireless via app Bluetooth®/Casambi™-, via switch, via un:c bus IPV6 network, via network cable -ready2mains™ -...)
- Your choice of emergency light functions
- Available as wall luminaire
- RAL colour as desired
- Surface: gold leaf, silver leaf (palladium)

NOTES:

- LUNÉA S is structurally identical as wall or ceiling luminaire
- 350° rotatable body

